

Scan the QR codes or go visit the URLs to access how-to video(s), the wiring guide, and other important information you may need to get the most out of your item.



rockvillesupport.com/rws10ca



rockvillesupport.com/rws12ca

FEATURES

1. High Level inputs (used with factory head unit or if the head unit has no RCA outputs): these inputs, also referred to as speaker level inputs, allow you to connect to the factory speaker wires. They are called High Level inputs because they convert the high voltage running through the factory speaker wires to a voltage the amplifier can handle. These inputs will provide the end user with clean, well defined sound for optimal musical enjoyment.

2. Bass Remote: Connect dashmounted bass remote (included) via RJ11 cable (included).

3. RCA Input: Connect to your head unit's RCA outputs.


4. Gain control: The Gain control tunes the amp's input stage to accept the head unit's RCA output voltage level. Turn it counterclockwise to the MIN position. Adjust head unit's volume

5. Low Pass Crossover control: Adjusts the frequencies, between 40Hz – 250Hz, that the sub will play. Whatever you set it to, the sub will only play frequencies below that setting.


6. Power LED: Indicates proper voltage and power.
Protect LED: Indicates a diagnostic condition (power connections, blown fuse, too high input, or internal failure).

7. Power connections: See Wiring diagram for proper set up.

8. Fuse

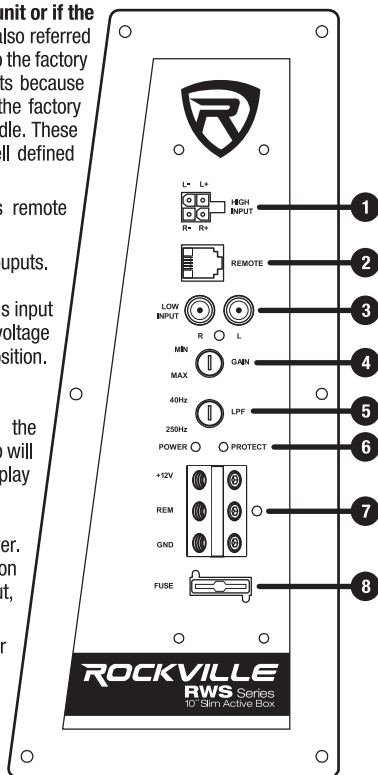


HIGH LEVEL INPUT

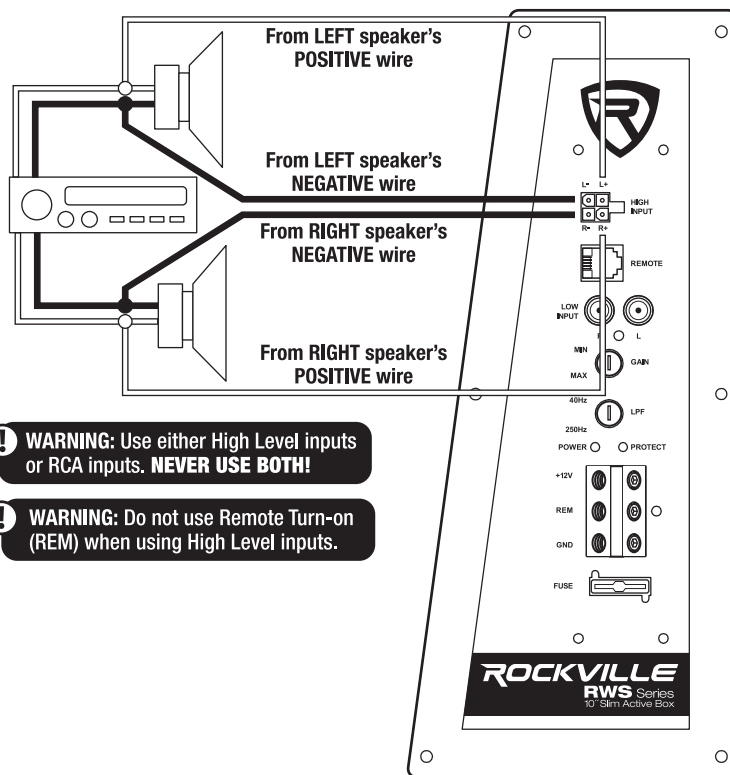

WIRING

! ATTENTION: The ground wire should be 8 gauge or heavier. Ensure that there is no paint or other insulator at the point of contact on the chassis.

! WARNING: Do not use Remote Turn-on (REM) when using High Level inputs.

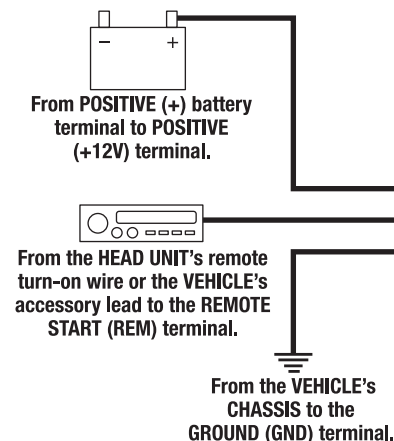

RCA INPUT/BASS REMOTE

! ATTENTION: If your Head Unit has an RCA subwoofer output, use a single RCA to dual RCA cable.

! WARNING: Use either High Level inputs or RCA inputs. NEVER USE BOTH!

