

# ROCKVILLE

## OWNER'S MANUAL WB65KLED

6.5" Wakeboard Tower Speakers w/Built-in LEDs

Please read this guide carefully for proper use of your WB65KLED 6.5" wakeboard tower speakers. Should you need assistance please call our technical help line at 1-646-758-0144, Monday through Thursday, 9am – 10pm EST, or Fridays, 9am to 3pm EST.


**Missing items?** If you ordered a bundle that includes more than one product and you are missing part of your bundle, then it just means your order shipped from two different warehouses. You will receive the remaining items very soon. If you have any concerns or inquiries, feel free to call our customer support center at the number listed above.

## Wiring

1. Speaker power + (red)
2. Speaker power – (black)
3. LED power + (white)
4. LED power – (blue)
5. LED power connect


- Connect the speaker positive (1) and negative wires (2) to the corresponding output terminals on the amplifier or receiver.
- Connect the LED power connect cables (5) as shown below.
- Connect the LED power wire (3) to the +12V (positive) terminal on your amplifier or receiver. Connect the LED ground wire (4) to the ground (negative) terminal on your amplifier or receiver. This will allow you to bypass the battery, which makes the installation much easier.


**Please note:** Make sure that the wires are properly inserted into the appropriate terminals and that no bare wire is exposed or making contact with other wires. Be sure to observe proper polarity.

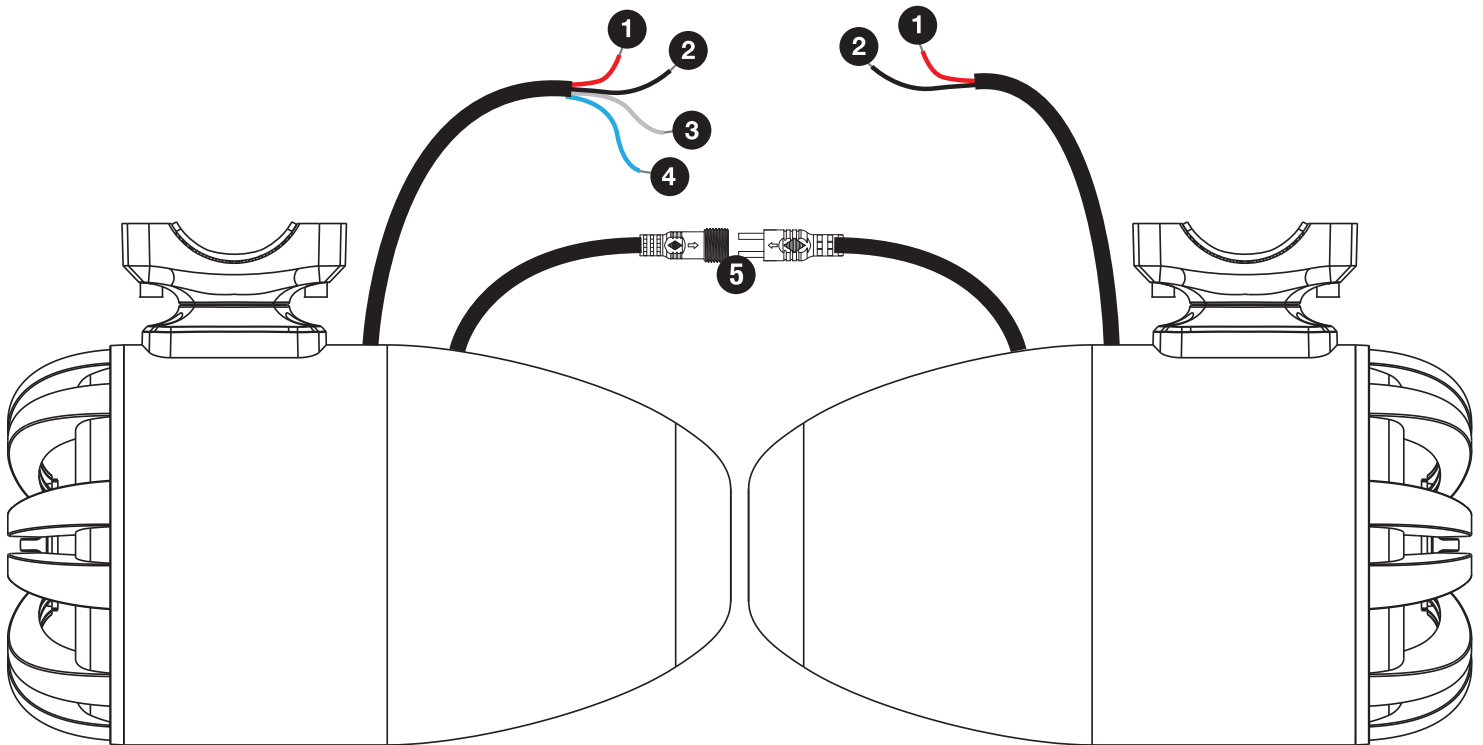


# 360° Rotation Function

1. Use an allen wrench to loosen the rotation adjustment screw.


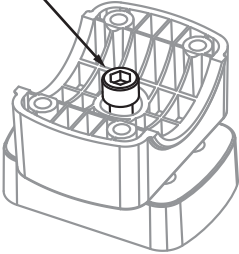

2. Rotate the lower mounting bracket to the desired position.

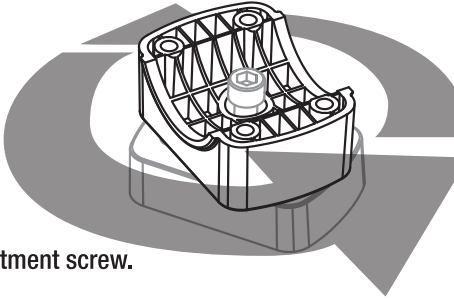
3. Tighten the rotation adjustment screw. Do not overtighten.

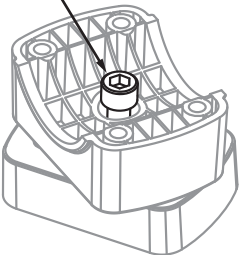

## Mounting Bracket


Bracket expands from 1.75" to 2.5" to fit a variety of wakeboard tower tube diameters. When making adjustments, use an allen wrench to loosen and tighten the screws.

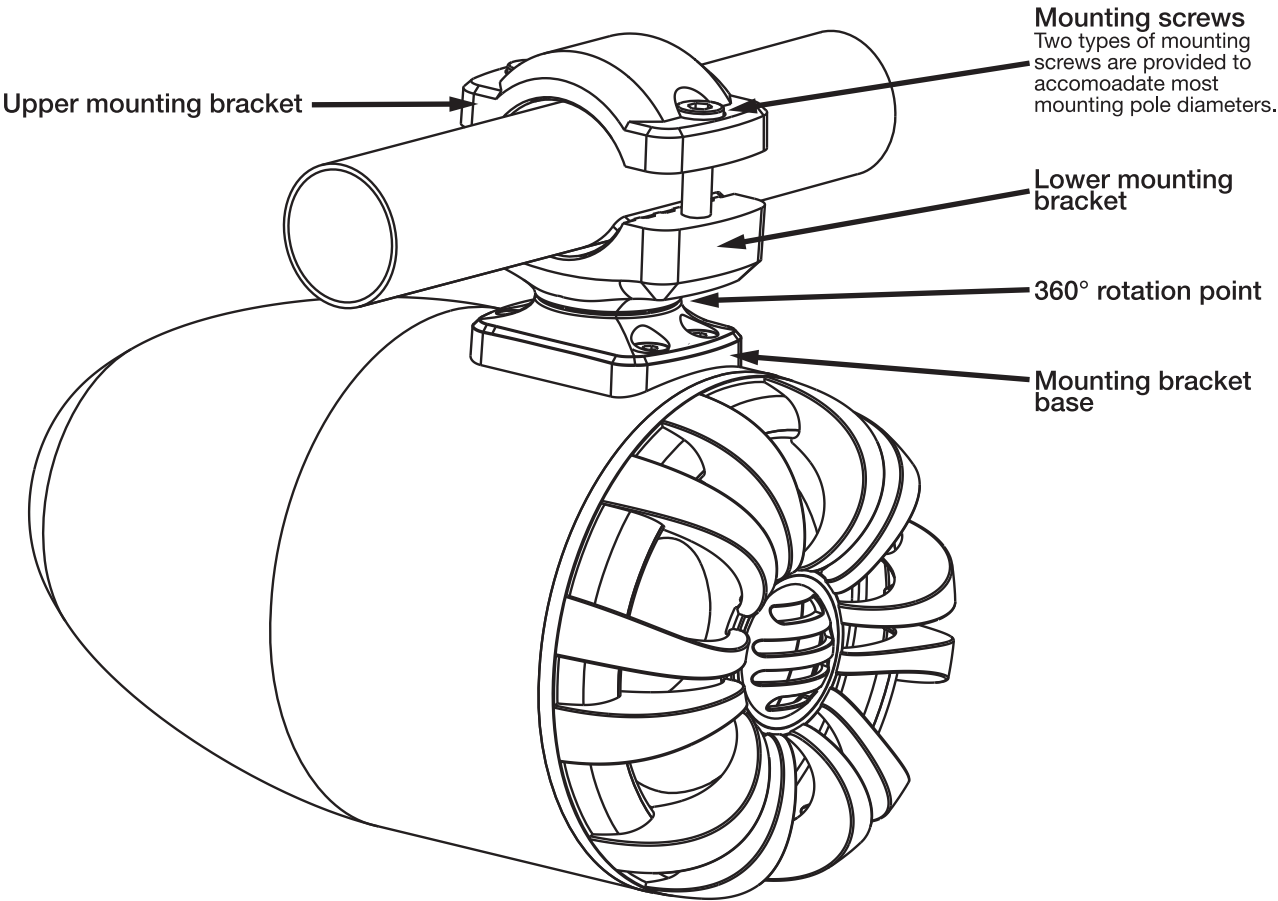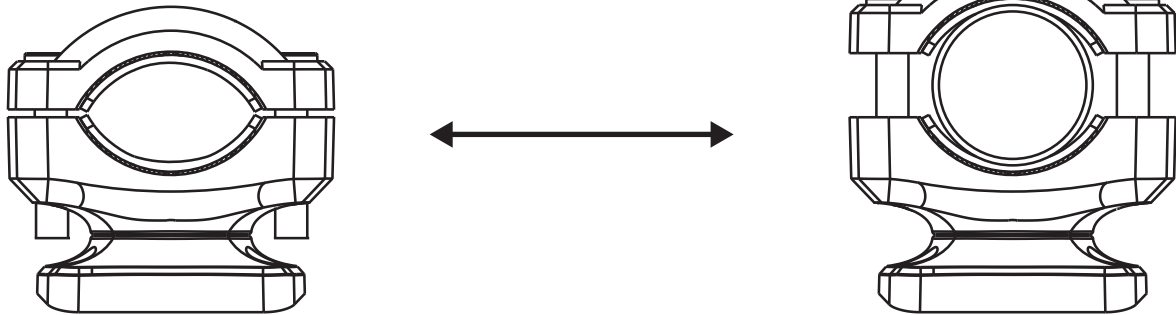

# Remote Control Features/LED Operation

- 1. Turn-On/Standby:** Turn on LEDs or switch to standby mode. The speaker will remember the last used LED mode.
- 2/9. Dynamic Mode:** Use to switch to dynamic mode from static color mode or to switch between dynamic modes.
- 3/10. Dynamic Mode Speed:** Use to adjust dynamic mode speed. If the unit is in static mode, pressing either of these buttons will activate dynamic mode.
- 4/5. Static Color Adjust:** Use to switch between static colors. If the unit is in dynamic mode, pressing either of these buttons will activate static mode.
- 6. Direct Color Select:** Use to select preset static colors.
- 7/8. Brightness Adjust:** Use these buttons to adjust brightness while in static mode. Pressing these buttons while the unit is in dynamic mode will switch it to static mode.
- 11. Demo Mode:** Press this button to activate demo mode. While in demo mode, the unit will loop through 17 dynamic modes, repeating each mode 3 times.

**PLEASE NOTE:** Be sure to remove the plastic cover from the battery compartment. The remote uses a 3 volt CR2025 battery (included). When replacing the battery, be sure to use one of the same type.

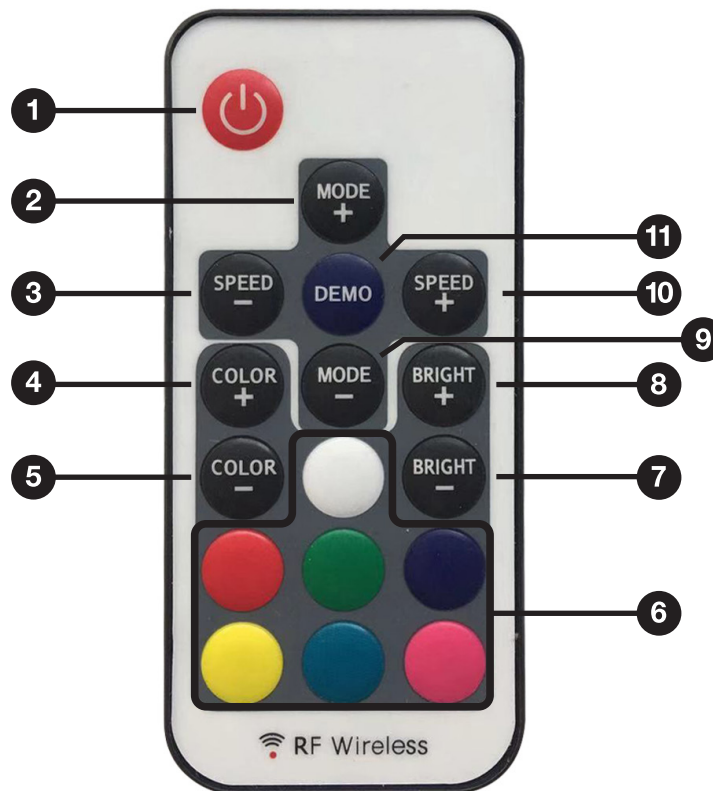

## Features

- Peak power handling per speaker: 300 Watts
- RMS power handling per speaker: 150 Watts
- Frequency response: 500Hz – 20KHz
- Sound pressure level: 90dB
- Impedance: 4 Ohms
- Full function remote controls LED functions
- Multi-color LEDs (blue, red, green, yellow, pink, purple, and white) with 20 static colors
- 22 Dynamic modes
- Steel enclosure
- Aluminum mounting bracket
- Quick and easy speaker angle adjustment
- Bracket rotates 360°
- 1" titanium dome tweeter
- Fully marinized against salt & fresh water conditions
- Completely resistant to water, rust, and UV rays
- Polypropylene mica injected cone with rubber surround
- 15oz high density magnet
- 1" voice coil
- CE and RoHS certified
- These wakeboard speakers fit bars ranging from 1.75" – 2.5"
- Dimensions per speaker (H x W x D): 7.8" x 7.8" x 11.8"
- Weight per speaker: 5.3 lbs.
- Available Colosr: Polished Silver and Black



***ROCKVILLE***

**RockvilleAudio.com**

© 2021 ROCKVILLE // Features and specifications are subject to change and or improvement without notice