

Faze

by **ROCKVILLE**

PORTABLE WATERPROOF BLUETOOTH SPEAKER w/TWS STEREO LINKING

WHO READS MANUALS?



Instead, go to vimeo.com/437946803 or scan the QR code and watch a short video that shows you how to set this item up and how to use it.

If you prefer written instructions, please read ahead!

With Rockville you get many options.

Please read this owner's manual carefully. Should you need assistance, please call our technical help line at 1-646-758-0144, Monday through Thursday, 9am to 10pm EST, and Fridays, 9am to 3pm EST. *If you ordered a bundle and you are missing part of it, your order shipped from two different warehouses. You will receive the remaining items very soon. If you have any questions, call the number listed above.*



INCLUDES

- Bluetooth speaker
- USB C charging cable

- 3.5mm to 3.5mm aux cable
- Detachable rubber strap

- Manual
- Warranty card

FUNCTIONS

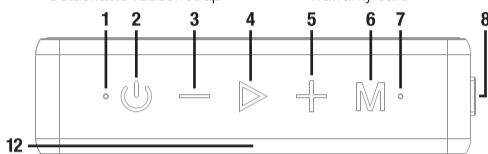

1. Power indicator LED
2. Power ON/OFF
3. Volume -/Previous track
4. Play/Pause and Answer/End call

5. Volume +/Next track
6. Mode
7. Status indicator LED
8. Lanyard ring

9. 3.5mm AUX in
10. USB C charging port
11. SD card slot
12. Microphone

OPERATION

Power ON: Hold down the Power button for 3 seconds. The unit will automatically enter into Bluetooth pairing mode. The status indicator LED will flash blue and the power indicator LED will be solid white.

Bluetooth

1st Time Pairing: Power ON the unit, The status indicator LED will flash quickly, Now look for and select FAZE on your Bluetooth device's list of available devices. If pairing is successful, the status indicator LED will remain solid blue. During playback, the status indicator will slowly flash blue. The FAZE unit will remember and automatically pair with previously paired devices.

Unpairing: To unpair current device, press and hold Play/Pause button for 2 seconds.

True Wireless Stereo (TWS)

If you have a pair of FAZE speakers, you can set them up as a 2.0 stereo speaker system. Please make sure the units are disconnected from any Bluetooth devices.

Pairing:

1. Turn on both speakers. Select one of the speakers and press the M (mode) button for 2 seconds until you hear a tone. This will be the master speaker. After pairing, only the master speaker can answer incoming phone calls.
2. If pairing is successful, the status indicator LED of one speaker will remain solid blue while the

status indicator LED of the other speaker will blink quickly.

3. Now look for and select FAZE on your Bluetooth device's list of available devices. If pairing is successful, the status indicator LED of both speakers will remain solid blue. The FAZE unit will remember previously paired devices and automatically go into TWS mode.

Unpairing: Hold down the M (mode) button for 2 seconds to exit TWS mode. Press and hold the M button for 5 seconds to erase pairing information and turn the unit off.

Playback Controls

Once paired, all playback functions (play/pause, volume, tracks) can be controlled from your playback source (ex. phone/mp3 player) without ever having to touch the unit. You can also control playback from the FAZE. Please note, if you are using an iPhone, iPad, or iPod the volume controls are synced so that if you raise the volume on your device, it will raise the volume on the unit and vice versa. If using an Android device, you will need to adjust the device's volume and the FAZE's volume independently.

Music: Press the Play/Pause button to begin or pause music playback.

Volume Control: Press the + button to increase the volume or press the - button to decrease the volume.

Skip Songs: Hold down the + button for the next song. Hold down the - button for the previous song.

Answering/Ending Calls: Press the Play/Pause button to answer incoming calls. Press the

Play/Pause button to end the conversation. To reject an incoming call hold down the Play/Pause button for 2 seconds. Double click to dial the last dialed number.

Siri: Press Power button to activate. Press Play/Pause button to exit.

Micro SD Card Input

Upon inserting a Micro SD card, the unit will automatically switch to SD mode and begin playing music. The status indicator LED will be solid blue.

Music Playback/Volume Control/Skip Songs: See the Playback Controls section above.

Please note: Supported file formats are APE, FLAC, WAV, WMA, and MP3.

Auxiliary

Use the included 3.5mm to 3.5mm cable to connect non Bluetooth external audio devices. The unit will automatically switch to auxiliary mode and the status indicator LED will be solid blue.

Music Playback/Skip Songs: Use your device to control Play/Pause and skip track functions

Volume Control: You will need to adjust the device's volume and the FAZE's volume independently. See the Playback Controls section above for volume control information.

Charging

When the FAZE's battery is low, the power indicator LED will flash red. To charge the unit, connect the included USB C cable to the USB C port at the side of the unit. Connect the other end to an AC adapter

(not included) or a computer USB port. Normal full charge time is 3 hours. The mode indicator LED will be solid red while charging and will turn off once the unit is fully charged. Please note, to conserve battery life, the unit will shut off after being idle for 10 minutes.

FEATURES and SPECIFICATIONS

- High quality drivers and a passive radiator woofer for amazing frequency range and sound
- Balanced sound with enhanced low frequency bass response
- Offers play/pause & previous/next track control on apps like Pandora, Spotify, and others
- Built-in microphone on the front of the unit for hands-free calling
- Compatible with any Bluetooth enabled device
- Rugged and shockproof with rubberized impact-resistant silicone feet.
- Perfect for the shower, bedroom, kitchen, pool, beach, biking, yoga, camping, hiking, etc.
- RMS Power Output: 20 Watts
- Peak Power: 50 Watts
- Actions 5.0 Bluetooth chipset with 40ft range
- IPX6 Waterproof rating – Completely submergible
- Micro SD card slot supports these formats: MP3/WMA/APE/FLAC/WAV

- (2) 1,800 Mah batteries run in series to 7.4 Volts
- Fast Charge Time: 2.5 Hours (supports 31 hours at 30% volume and 15 hours at 90% volume)
- Distortion: Less than 1%
- Frequency Response: 115Hz – 15KHz
- Dimensions: 7.32" x 1.97" x 2.44"/Weight: 1.16Lbs.

TROUBLESHOOTING

No Power	<ul style="list-style-type: none"> • Connect the unit to a USB power source for 3 to attain full charge.
Bluetooth pairing fails	<ul style="list-style-type: none"> • Make sure both devices are turned on and that your BT device is discoverable. • Make sure you've selected the proper source. • Make sure the BT device is within 5ft of the unit. • Move both devices away from other BT devices, wireless routers, and other electronics. • Make sure the unit is not paired to another device.
TWS pairing fails	<ul style="list-style-type: none"> • Make sure both devices are disconnected from any previously paired devices. • Turn-on the first unit and follow the TWS pairing steps. • Make sure the speakers are near each other during the pairing process.
No SD playback	<ul style="list-style-type: none"> • Make sure that the audio files are in the proper format (see Micro SD Card Input section.) • Check the SD card for damage and make sure that it is properly inserted.

FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION

Responsible party name: Rockville

Address: 600 Bayview Ave,
Entrance A,
Inwood, NY 11096

Hereby declares that the product Rockville FAZE portable Bluetooth speaker complies with FCC rules as mentioned in the following paragraph:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

RockvilleAudio.com

© 2021 ROCKVILLE // Features and specifications are subject to change and/or improvement without notice.